



Product Features:

1. Silent operation.
2. Build-in automatic switch: The pump auto runs when using water; Auto stop running when no using water.
3. Compact design for saving space.
4. Durability, Easy Dismantle and Installation.

Applications:

1. Auto boost water pressure for water heaters.
2. Auto boost water pressure for household washing machine, toilets, kitchen, etc.




Motor spec.:

1. 2 pole induction motor.
2. Insulation class: H.
3. Protection class: IP42.
4. Voltages: 1 phase 110V,220V
5. Frequency: 60Hz.


Operating Conditions:

1. Ambient temperature: 0~40°C.
2. Liquid temperature: 0~60°C.
3. It is suitable for clean water without solid particles.
4. Max. working pressure: 6 Bar.

Performance Curves:

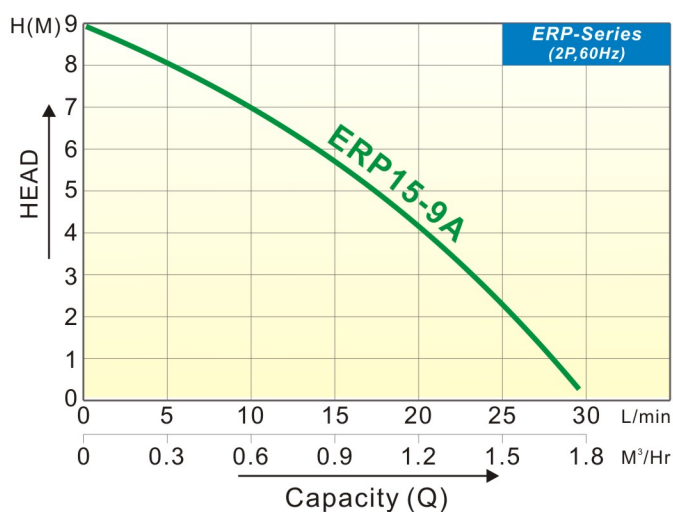

Dimensions:

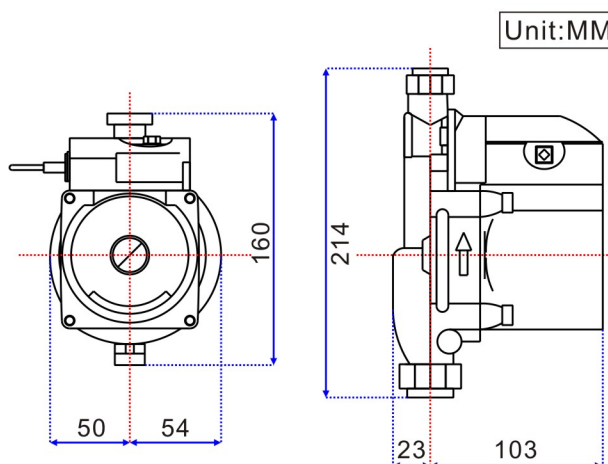

Specification:

(60HZ,3500R.P.M)

Model	Horse power W	Inlet/Outlet		Pole P	Phase ø	Voltage V	Current A	Max.H M	Max.Q L/MIN	Std.H M	Std.Q L/MIN	Net Weight KG
		INCH	MM									
ERP15-9A	120	1/2"	15	2	1	110/220	1.0/0.5	9.0	30	7.0	10	2.5