



ST/BS/BC-Series 60Hz



STAINLESS STEEL DEEP WELL PUMPS



ASIA AUTOMATIC PUMP CO., LTD
www.evergushpump.com.tw/en



ST18,ST25 Technical Data

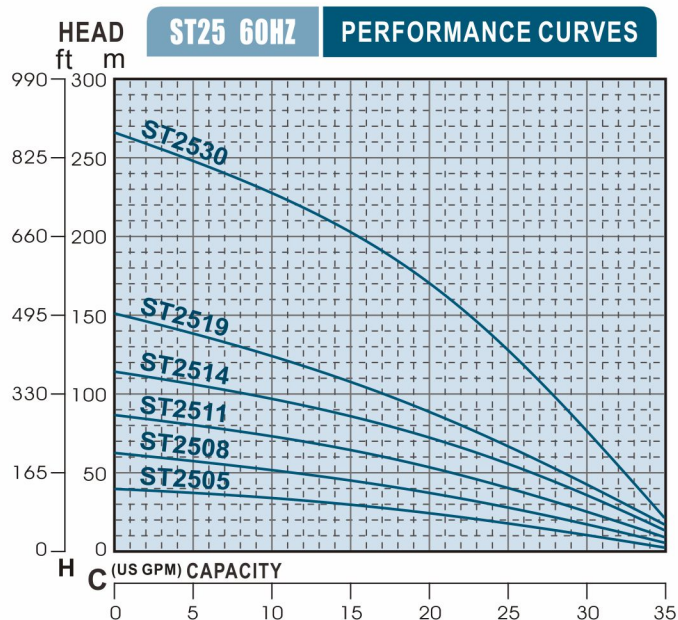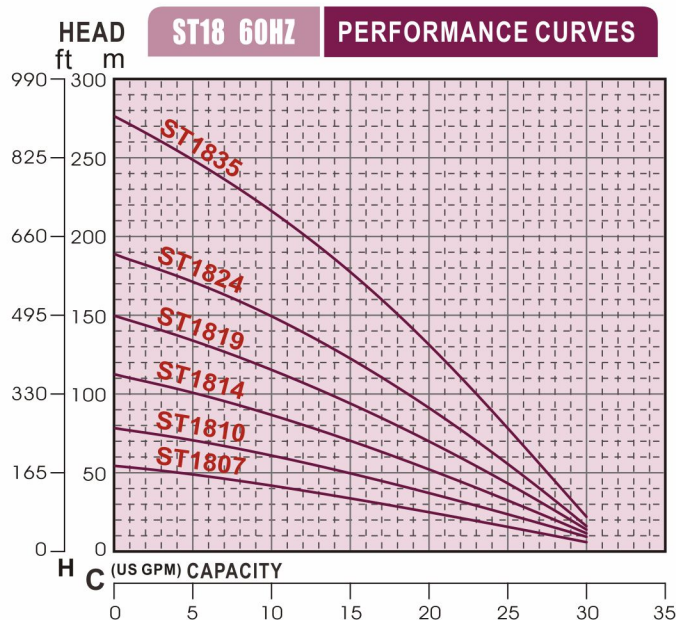

SPECIFICATIONS



● 1 US GPM=3.785 LPM

TYPE		STAGES	MOTOR		(UNIT:MM) DIMENSION		H: HEAD(M) C: CAPACITY(GPM)			
							STANDARD		MAXIMUM	
			KW	HP	L	L1	H	C	H	C
4D	ST1807	7	0.37	1/2	340	93	35	15	55	30
	ST1810	10	0.75	1	421	93	50	15	80	30
	ST1814	14	1.1	1.5	526	93	70	15	112	30
	ST1819	19	1.5	2	662	93	95	15	150	30
	ST1824	24	2.2	3	835	93	125	15	190	30
	ST1835	35	3.7	5	1164	93	180	15	275	30
	ST2505	5	0.55	1/2	287	93	25	20	40	35
	ST2508	8	0.75	1	368	93	38	20	61	35
	ST2511	11	1.1	1.5	448	93	55	20	88	35
	ST2514	14	1.5	2	527	93	72	20	115	35
	ST2519	19	2.2	3	663	93	90	20	150	35
	ST2530	30	3.7	5	1026	93	170	20	265	35

- Standard: Water-immersed Motor.
- FRANKLIN Motor is optional.
- Oil-immersed motor can be customized upon needs.
- Suitable for 4" well.



ST37,ST42 Technical Data

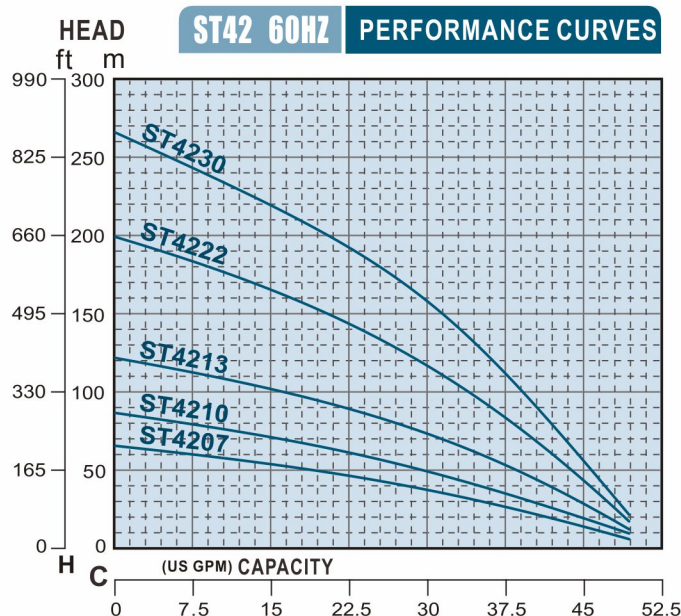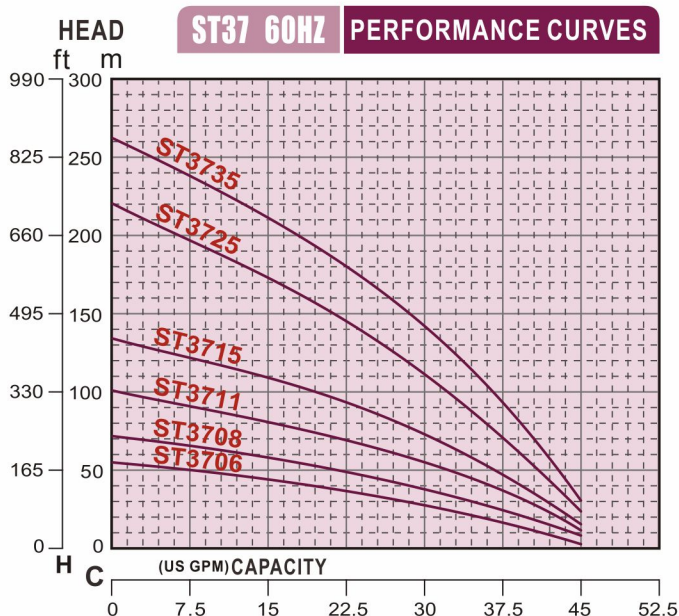

SPECIFICATIONS



● 1 US GPM=3.785 LPM

TYPE		STAGES	MOTOR		DIMENSION (UNIT:MM)		H: HEAD(M) C: CAPACITY(GPM)			
							STANDARD		MAXIMUM	
					KW	HP	L	L1	H	C
4D	ST3706	6	0.75	1	347	93	28	30	55	45
	ST3708	8	1.1	1.5	411	93	38	30	71	45
	ST3711	11	1.5	2	508	93	55	30	100	45
	ST3715	15	2.2	3	672	93	72	30	132	45
	ST3725	25	3.7	5	994	93	110	30	220	45
	ST3735	35	5.5	7.5	1326	93	140	30	260	45
	ST4207	07	1.1	1.5	378	93	33	33	65	50
	ST4210	10	1.5	2	475	93	43	33	85	50
	ST4213	13	2.2	3	571	93	65	33	120	50
	ST4222	22	3.7	5	898	93	105	33	200	50
	ST4230	30	5.5	7.5	1156	93	140	33	265	50

- Standard: Water-immersed Motor.
- FRANKLIN Motor is optional.
- Oil-immersed motor can be customized upon needs.
- Suitable for 4" well.



ST65,ST5BS Technical Data

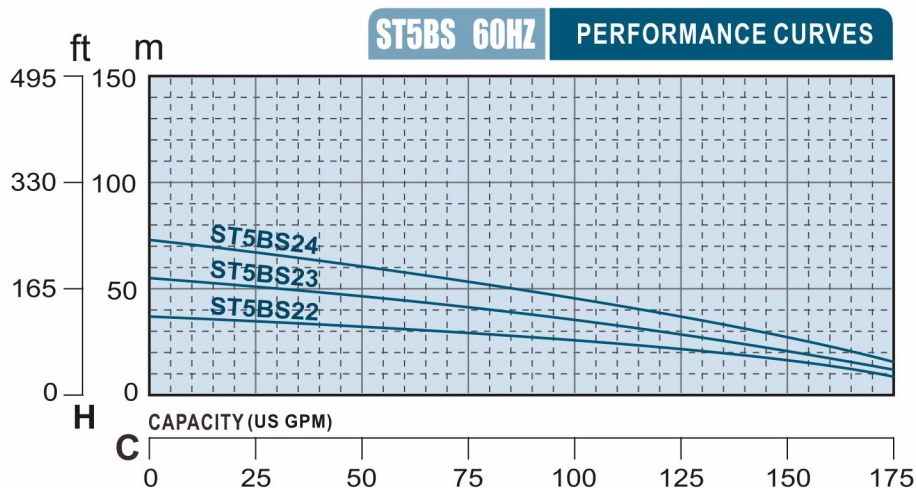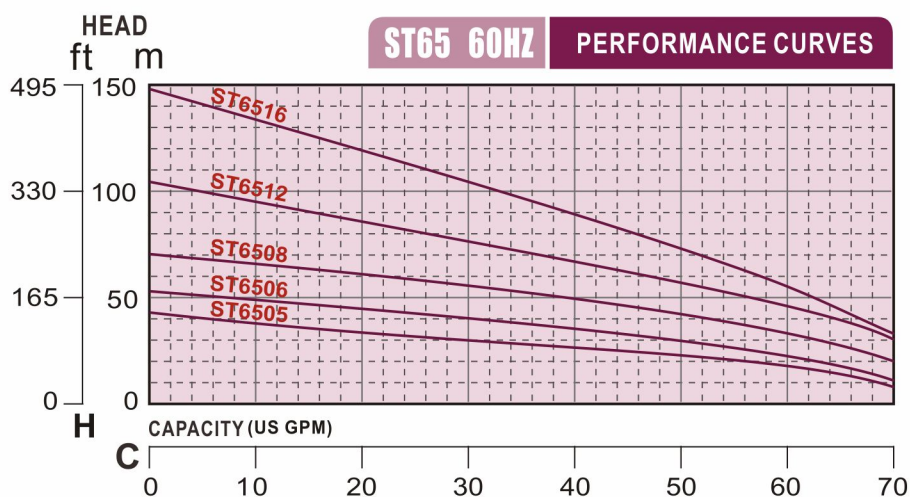

SPECIFICATIONS

● 1 US GPM=3.785 LPM

TYPE	STAGES	MOTOR	(UNIT:MM)		H: HEAD(M)		C: CAPACITY(GPM)			
							STANDARD		MAXIMUM	
			KW	HP	L	L1	H	C	H	C
4D	ST6505	5	1.1	1.5	439	93	20	50	42	70
	ST6506	6	1.5	2	497	93	30	50	52	70
	ST6508	8	2.2	3	611	93	40	50	70	70
	ST6512	12	3.7	5	878	93	55	50	105	70
	ST6516	16	5.5	7.5	1112	93	70	50	150	70
6D	ST5BS22	2	2.2	3	264	117	25	100	35	175
	ST5BS23	3	3.7	5	311	117	35	100	55	175
	ST5BS24	4	5.5	7.5	358	117	45	100	72	175

- Standard:Water-immersed Motor.
- FRANKLIN Motor is optional.
- Oil-immersed motor can be customized upon needs.
- Suitable for 4" well.