



EF4-615
 Output(KW)
 Discharge(Inch)
 4 Pole
 Sub.Sewage Pump




APPLICATIONS

- Drainage of food market, animal husbandry and water refining tank. Water treatment of wastewater plant, drainage of basement, food industries, leather industries, pulp and paper industries, dyeing industries, and various industrial wastewater...etc.

FEATURES

- High efficient motor is adopted, shaft and rotor are machining precisely to raise stability. Serious quality control and high class of insulation are provided for long time operation and service life.
- Guide rail device is available (optional).
- Dependable dual mechanical seals are adopted for high wear and heat resistance, and to maintain long life.
- Impeller is designed for special water flow and big capacity of pumphousing to meet dependable performance, and high efficiency for various wastewater.
- Inner cable wires and cable base are upgraded by filling EPOXY to raise humidity-resistance.

PERFORMANCE CURVES

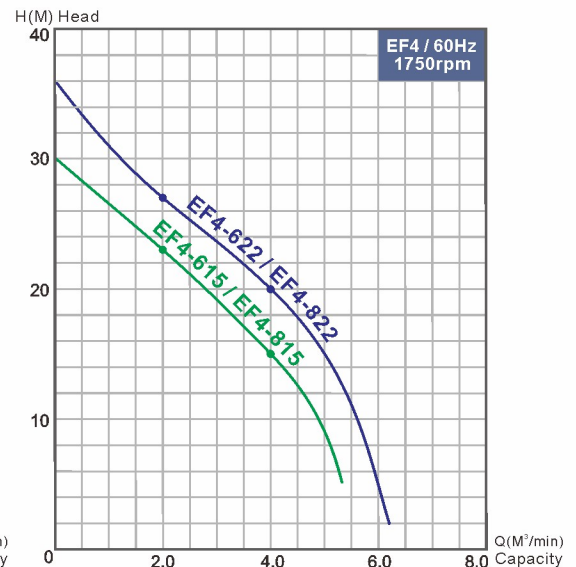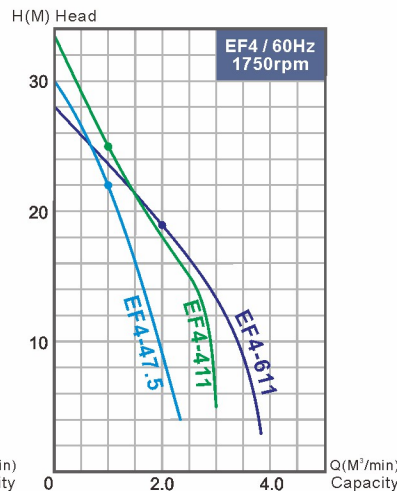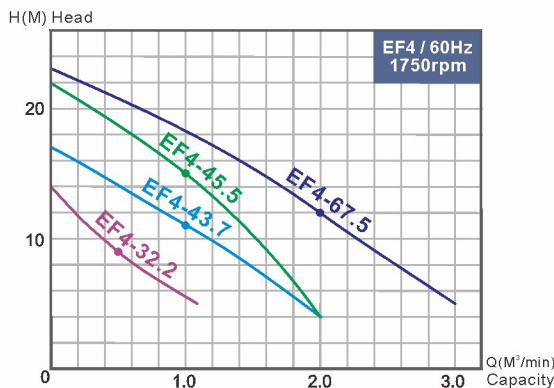

SPECIFICATIONS

4P-1750RPM

Model	Output HP (kW)	Discharge inch	Phase Ø	Start Method	Standards		Free Passage mm	Length mm	Width mm	Height mm	Weight kg
					Head m	Capacity m³/min					
EF4-32.2	3 (2.2)	3"	3	Direct	9	0.5	40	560	310	620	80
EF4-43.7	5 (3.7)	4"	3	Direct	11	1.0	40	560	310	680	86
EF4-45.5	7½ (5.5)	4"	3	Direct	15	1.0	40	600	360	710	108
EF4-47.5	10 (7.5)	4"	3	Direct	22	1.0	40	730	430	820	154
EF4-67.5	10 (7.5)	6"	3	Direct	12	2.0	45	780	480	820	184
EF4-411	15 (11)	4"	3	Y-Δ	25	1.0	45	730	430	900	200
EF4-611	15 (11)	6"	3	Y-Δ	19	2.0	50	940	480	950	250
EF4-615	20 (15)	6"	3	Y-Δ	23	2.0	55	940	480	950	250
EF4-815	20 (15)	8"	3	Y-Δ	15	4.0	60	950	480	950	270
EF4-622	30 (22)	6"	3	Y-Δ	27	2.0	55	950	480	990	290
BF4-822	30 (22)	8"	3	Y-Δ	20	4.0	60	950	480	990	300