



不銹鋼沉水式深井泵

ST/BS/BC 系列



(不銹鋼SUS304
泵體/泵葉/導葉)

不銹鋼沉水式深井泵浦-ST18,ST25型

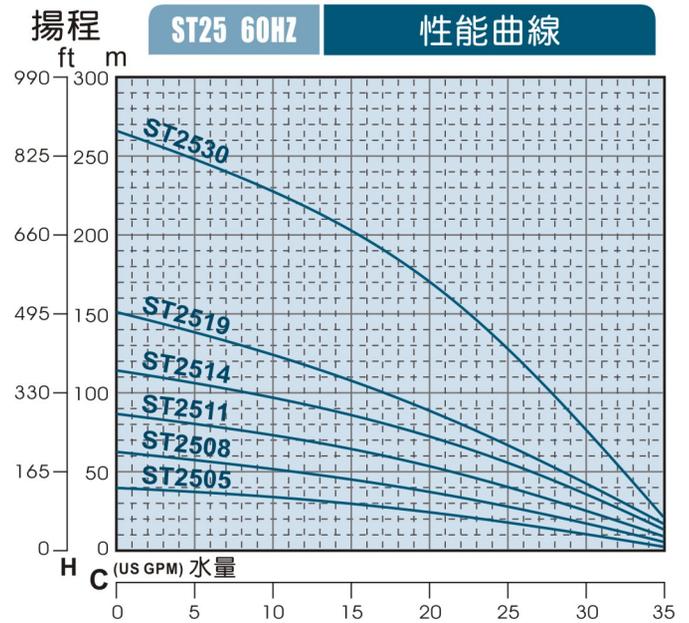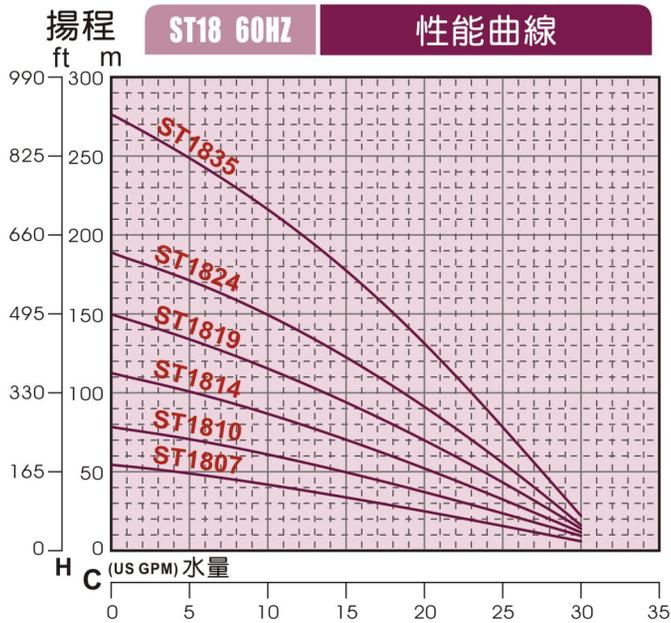

規格 / 性能表

● 1 US GPM=3.785 LPM

TYPE 型式	STAGES 段數	MOTOR 馬力		DIMENSION 尺寸		HEAD(M) / CAPACITY(GPM) H揚程 / C水量				
		KW	HP	L	L1	STANDARD 標準		MAX. 最大		
						H	C	H	C	
4D	ST1807	7	0.55	1/2	340	93	35	15	55	30
	ST1810	10	0.75	1	421	93	50	15	80	30
	ST1814	14	1.1	1.5	526	93	70	15	112	30
	ST1819	19	1.5	2	662	93	95	15	150	30
	ST1824	24	2.2	3	835	93	125	15	190	30
	ST1835	35	3.7	5	1164	93	180	15	275	30
	ST2505	5	0.55	1/2	287	93	25	20	40	35
	ST2508	8	0.75	1	368	93	38	20	61	35
	ST2511	11	1.1	1.5	448	93	55	20	88	35
	ST2514	14	1.5	2	527	93	72	20	115	35
ST2519	19	2.2	3	663	93	90	20	150	35	
ST2530	30	3.7	5	1026	93	170	20	265	35	



- 標準採用水式馬達,可依特殊需求訂製油式馬達。
- 適用於 4" 深井。

可依照特殊需求
訂製富蘭克林馬達



FRANKLIN ELECTRIC MOTOR

不銹鋼沉水式深井泵浦-ST37,ST42型

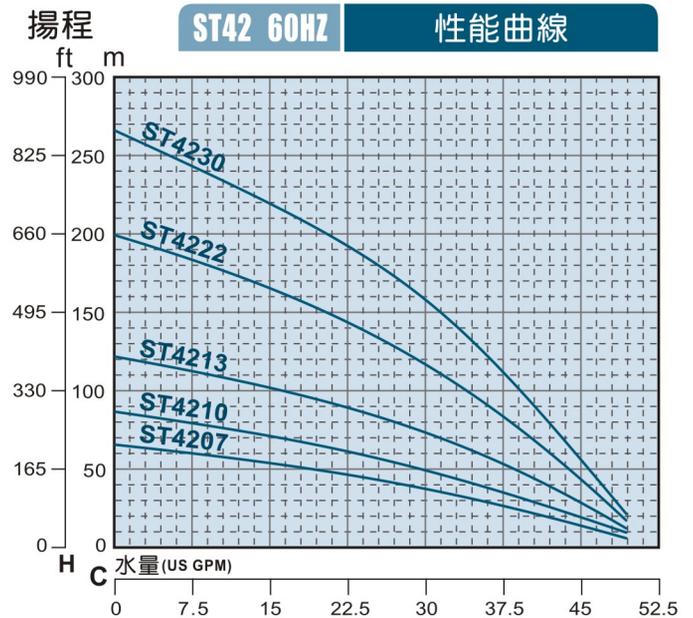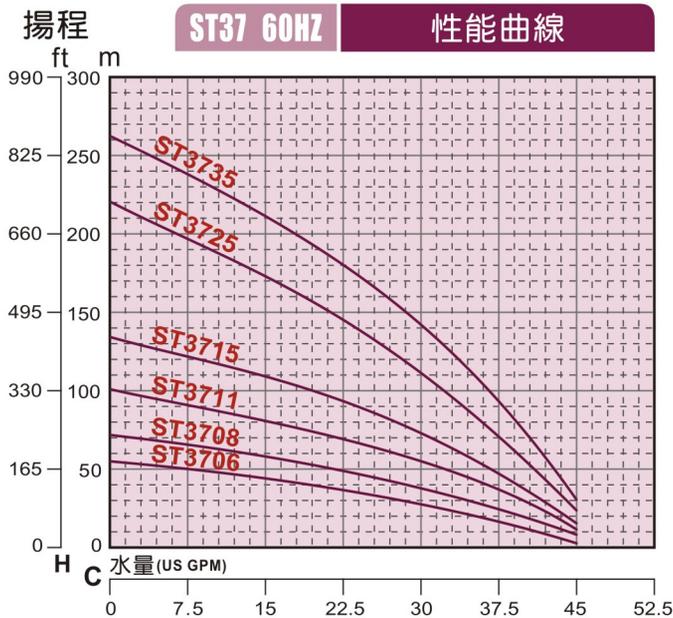

規格 / 性能表



● 1 US GPM=3.785 LPM

TYPE 型式	STAGES 段數	MOTOR 馬力		DIMENSION (UNIT:MM) 尺寸		HEAD(M) / CAPACITY(GPM) H揚程 / C水量				
		KW	HP	L	L1	STANDARD 標準		MAX. 最大		
						H	C	H	C	
4D	ST3706	6	0.75	1	347	93	28	30	55	45
	ST3708	8	1.1	1.5	411	93	38	30	71	45
	ST3711	11	1.5	2	508	93	55	30	100	45
	ST3715	15	2.2	3	672	93	72	30	132	45
	ST3725	25	3.7	5	994	93	110	30	220	45
	ST3735	35	5.5	7.5	1326	93	140	30	260	45
	ST4207	07	1.1	1.5	378	93	33	33	65	50
	ST4210	10	1.5	2	475	93	43	33	85	50
	ST4213	13	2.2	3	571	93	65	33	120	50
	ST4222	22	3.7	5	898	93	105	33	200	50
	ST4230	30	5.5	7.5	1156	93	140	33	265	50

- 標準採用水式馬達,可依特殊需求訂製油式馬達。
- 適用於4"深井。

可依照特殊需求
訂製富蘭克林馬達  **FRANKLIN ELECTRIC**
MOTOR

不銹鋼沉水式深井泵浦-ST65,ST5BS型

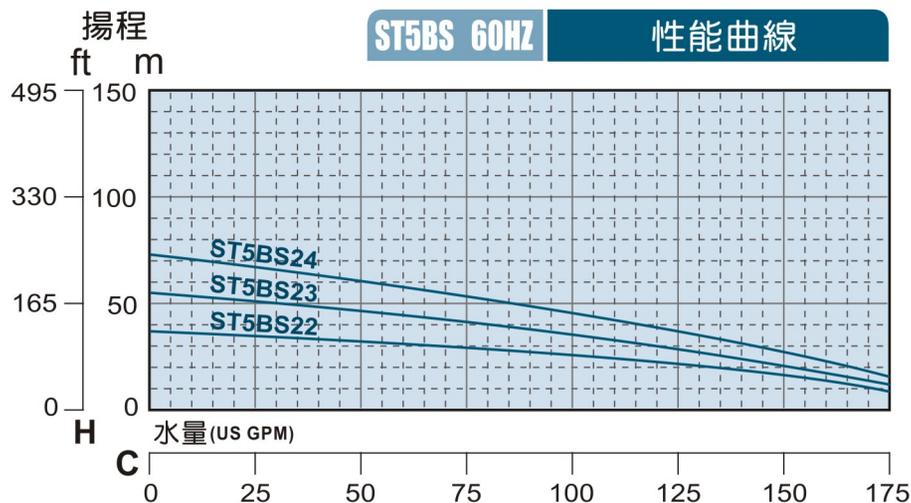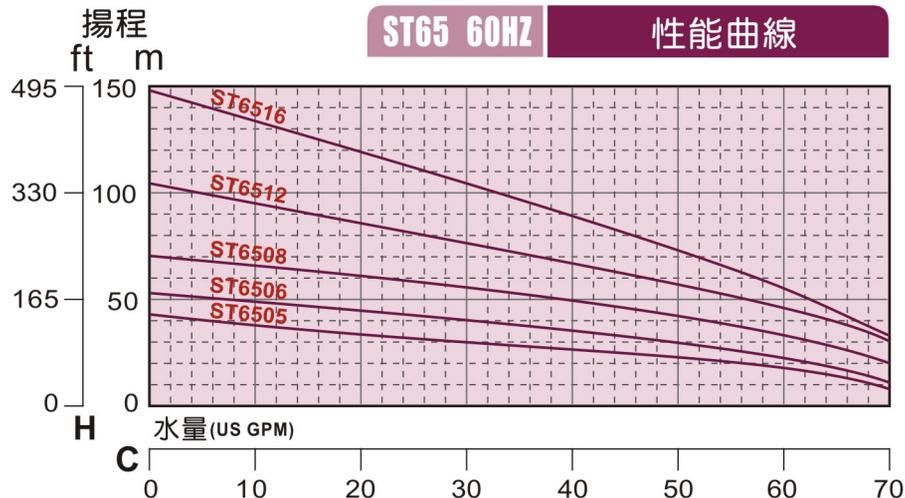

規格 / 性能表

● 1 US GPM=3.785 LPM

TYPE 型式	STAGES 段數	MOTOR 馬力		DIMENSION (UNIT:MM) 尺寸		HEAD(M) / CAPACITY(GPM) H揚程 / C水量				
		KW	HP	L	L1	STANDARD 標準		MAX. 最大		
						H	C	H	C	
4D	ST6505	5	1.1	1.5	439	93	20	50	42	70
	ST6506	6	1.5	2	497	93	30	50	52	70
	ST6508	8	2.2	3	611	93	40	50	70	70
	ST6512	12	3.7	5	878	93	55	50	105	70
	ST6516	16	5.5	7.5	1112	93	70	50	150	70
6D	ST5BS22	2	2.2	3	264	117	25	100	35	175
	ST5BS23	3	3.7	5	311	117	35	100	55	175
	ST5BS24	4	5.5	7.5	358	117	45	100	72	175

- 標準採用水式馬達,可依特殊需求訂製油式馬達。
- 適用於 4" 深井。

可依照特殊需求
訂製富爾克林馬達

